Oncel®

Milking System Parts & Livestock Equipment

www.oncelmak.com

MILKING MACHINES CATALOG

Be Previleged with Oncel® Because You, deserve it...

#oncelmakina

.26

Oncel® MILKING MACHINES

Founded in 2003 by Mr.Mehmet Oncel as "Oncel Makina", today a family business, based at Mustafakemalpasha, Bursa, is ran by Mr. Mehmet's son Mr.Remzi Oncel as "Oncel Makina San. ve Tic. Ltd. Sti.".

Oncel Makina manufactures mobile milking machines, milking system parts and livestock equipment for cows, goats and sheep. All of our products are made of food grade raw materials.

Oncel Makina is proud to inform you about the care and responsibility the company shows in order to endure the fruitful collaboration with its highly esteemed customers and partners. During 15 years of Oncel Makina's functioning the company manufactures and delivers complete and high quality milking machines and spare parts.

Why Oncel?

Innovation

We are a company which is open to innovation , which follows to innovations and which is adding the new products to it's product range.

Business Network

We have sale points in every city of Turkey and we are exporting many foreign countries. Also for understanding to expectations and needs of our customers, for providing quality products and services to our customers and for remaning as most esteemed supplier of our customers, our service vehicles are at your service.

Portfolio

Thus, in this sector by having %80 of Turkish Market and by exporting many countries, we proved our company in both domestic and overseas markets as a company which is a brand and as a company which does not compromise from the quality.

#oncelmakina

www.oncelmak.com

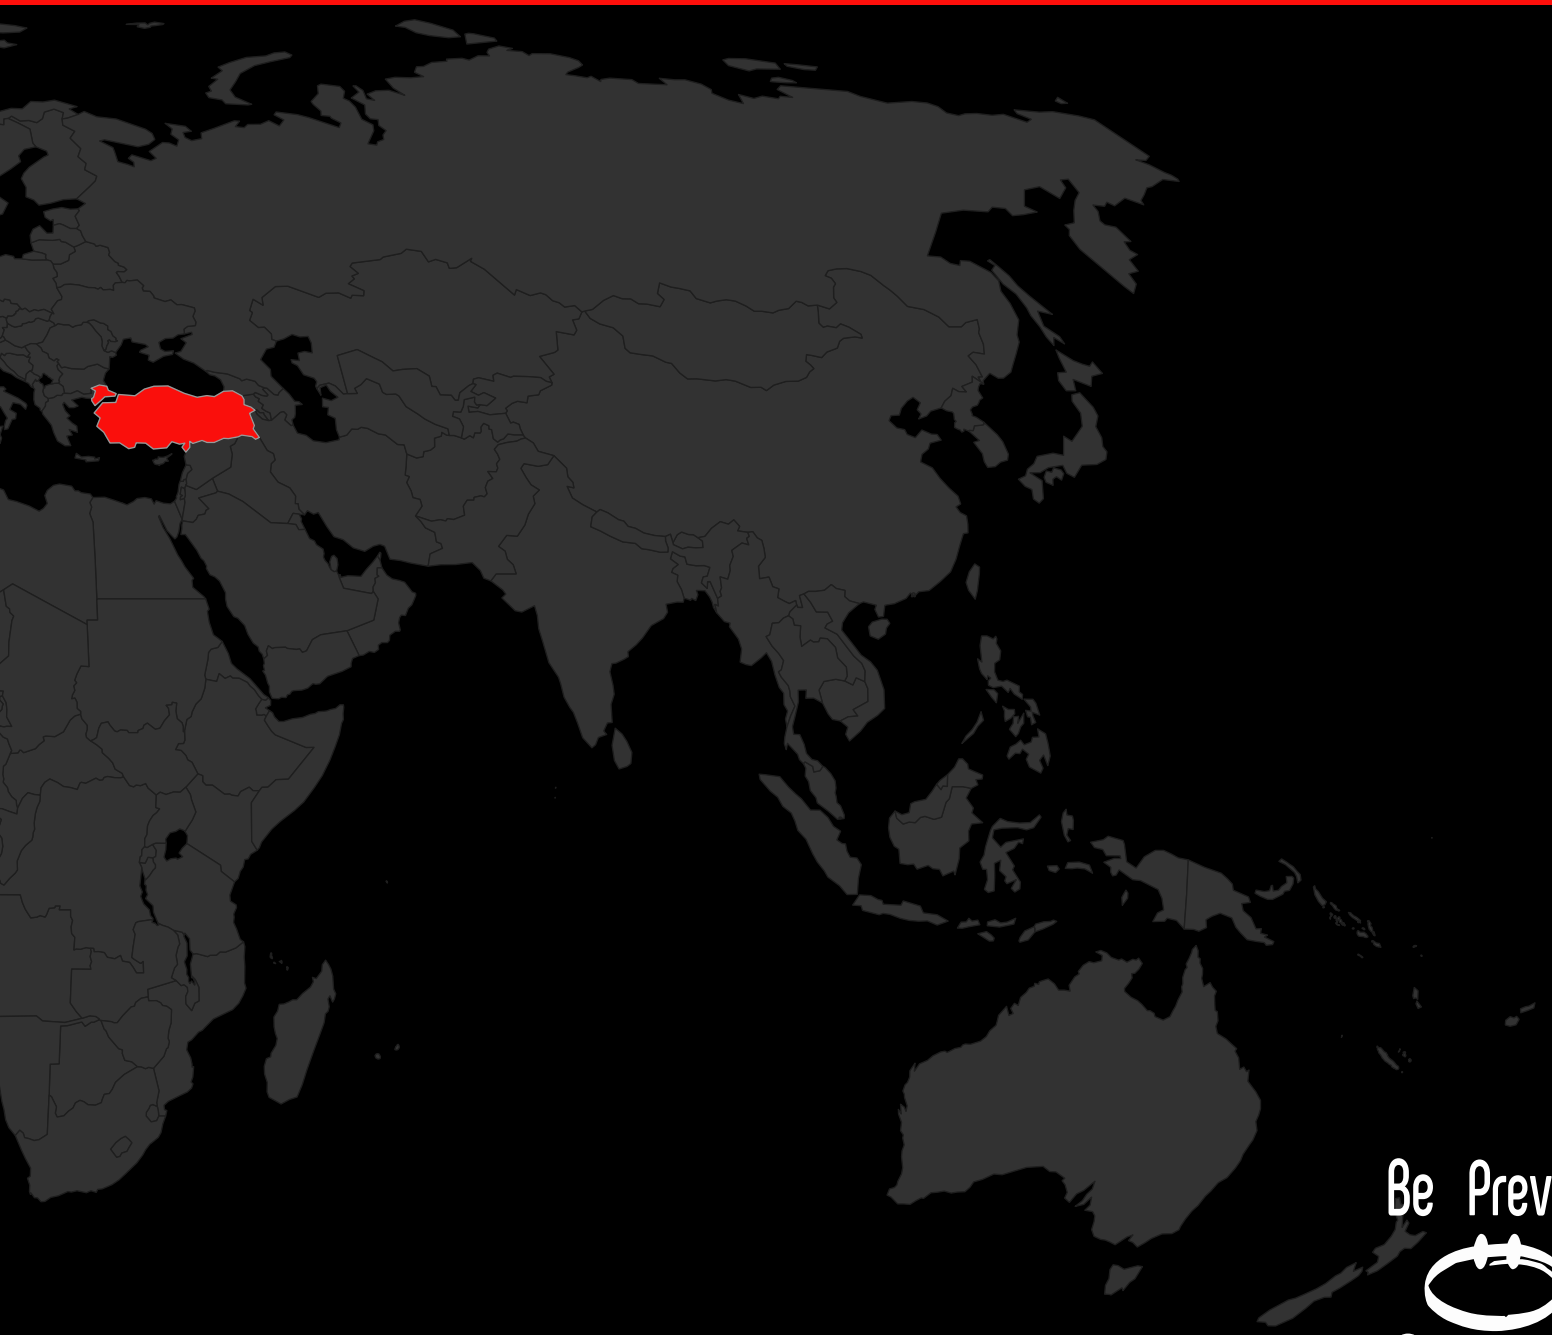

Be Previleged with

Öncel®

Because You,

deserve it...

Oncel MAKINA
Oncel MAKINA

Contents

1 Cow Milking Machines

2 Sheep & Goat Milking Machines

3 Fixed System Milking Machines

4 Milking Parlours

5 Milking Machines Chassises

Oncel®

Cow Milking Machines

1

www.oncelmak.com

• Milking liners are the only parts that touches to your animal so you need to pay more attention for the liners. We always offer our valuable business partners to change the rubber liners every 6 months (1000 hours usage) and silicone liners every 11 months (1500 hours usage)

•Pulsation rate must be 60/40 for cow milking.

•Before and after milking process ,teats must be cleaned.

•For the production of 1 liter of milk with 4% fat, the cow needs 4-5 liters of water.

• Milk should be cooled to 4-5 C within 2 hours at the latest.

•Allowing animals to drink fresh and clean water whenever they want provides the opportunity to increase milk yield in cows.

•The milking machine is in teat less than necessary or Too much causes of mastitis.

•A cow can consume feed around 4 kg in total during milking.

•if no precautions are taken against the summer heat, both pregnancy rate and milk yield decreases.

•It must be given bright places and environment at least 16 hours for the cows.

Oncel®

www.oncelmak.com

DRY ÖC. 1000

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 1000-A

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Turbo Oily Pump


Optional : Lubricator Tank Oily Pump



H W L

kg 55 kg

Gasoline Engine
ÖC.1000/B (Dry)
ÖC.1000/C (Oil)

Product Specifications

Chassis
Width : 60 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pc.
Upper lid : PVC

Vacuum Pump
Type : 160/180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 1x240 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell : Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

DRY ÖC. 1001

SINGLE MILKING UNIT,
SINGLE STAINLESS STELL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 1001-A

SINGLE MILKING UNIT,
SINGLE STAINLESS STELL BUCKET,
COW MILKING MACHINES


Turbo Oily Pump


Optional : Lubricator Tank Oily Pump



H W L

kg
56 kg

Gasoline Engine
ÖC.1001/B (Dry)
ÖC.1001/C (Oil)

Product Specifications

Chassis
Width : 60 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pc.
Upper lid : PVC

Vacuum Pump
Type : 160/180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 1x240 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

DRY **ÖC. 1002**

DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Dry Pump

OIL **ÖC. 1002-A**

DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Turbo Oily Pump


Optional : Lubricator Tank
Oily Pump



H W L

kg
61 kg

Gasoline Engine
ÖC.1002/B (Dry)
ÖC.1002/C (Oil)

Product Specifications

Chassis
Width : 60 cm
Length : 100cm
Height : 102 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 40 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 2x240 cc Plastic
Milking Claw : 8x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

DRY

ÖC. 1003

DOUBLE MILKING UNIT,
SINGLE STAINLESS STELL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL

ÖC. 1003-A

DOUBLE MILKING UNIT,
SINGLE STAINLESS STELL BUCKET,
COW MILKING MACHINES


Turbo Oily Pump


Optional : Lubricator Tank Oily Pump



H W L

kg
63 kg

Gasoline Engine
ÖC.1003/B (Dry)
ÖC.1003/C (Oil)

Product Specifications

Chassis

Width : 60 cm
Length : 100 cm
Height : 102 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 40 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 2x240 cc Plastic
Milking Claw : 8x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

DRY ÖC. 1008

DOUBLE MILKING UNIT,
DOUBLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 1008-A

DOUBLE MILKING UNIT,
DOUBLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Turbo Oily Pump
Optional : Lubricator Tank Oily Pump



H W L

kg 76 kg

Gasoline Engine
ÖC.1008/B (Dry)
ÖC.1008/C (Oil)

Product Specifications

Chassis
Width : 90 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 2 pcs.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 1x240 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell : Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

DRY

ÖC. 1009

DOUBLE MILKING UNIT,
DOUBLE STAINLESS STELL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL

ÖC. 1009-A

DOUBLE MILKING UNIT,
DOUBLE STAINLESS STELL BUCKET,
COW MILKING MACHINES


Turbo Oily Pump


Optional : Lubricator Tank
Oily Pump



H W L

77 kg

Gasoline Engine
ÖC.1009/B (Dry)
ÖC.1009/C (Oil)

Product Specifications

Chassis

Width : 90 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Stainless Steel
Qty : 2 pcs.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 2x240 cc Plastic
Milking Claw : 8x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, C
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO Type

DRY ÖC. 1000-1

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 1000-1/A

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Lubricator Tank Oily Pump





Product Specifications

Chassis

Width : 53 cm
Length : 82 cm
Height : 97 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 1 pc.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 1x240 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ECO Type

DRY ÖC. 1001-1

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 1001-1/A

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Lubricator Tank Oily Pump





Product Specifications

Chassis

Width : 53 cm
Length : 82 cm
Height : 97 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 1 pc.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 1x240 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell : Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ECO Type

DRY ÖC. 1002-1

DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES



OIL ÖC. 1002-1/A

DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES







Product Specifications

Chassis

Width : 55 cm
Length : 95 cm
Height : 92 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 2 pcs.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 2x240 cc Plastic
Milking Claw : 8x Rubber Liners
Weight : 2300 kg
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell : Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ECO Type

DRY ÖC. 1003-1

DOUBLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 1003-1/A

DOUBLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Lubricator Tank Oily Pump



H W L

kg
54 kg

Product Specifications

Chassis
Width : 55 cm
Length : 95 cm
Height : 92 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 2x 240 cc Plastic
Milking Claw : 8x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO *PLUS*

DRY ÖC. 2000

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 2000/A

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES


Lubricator Tank Oily Pump





Product Specifications

Chassis

Width : 55 cm
Length : 95 cm
Height : 92 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 1x 160 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO *PLUS*

DRY ÖC. 2001

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL ÖC. 2001/A

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Lubricator Tank Oily Pump



H W L

kg
54 kg

Product Specifications

Chassis
Width : 55 cm
Length : 95 cm
Height : 92 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 1x240 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell : Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO *MINI*

DRY ÖC. 1000-3

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES



OIL ÖC. 1000-3/A

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES







Product Specifications

Chassis

Width : 55 cm
Length : 85 cm
Height : 82 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 1x 160 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell : Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ECO *SUPER*

DRY ÖC. 1000-5

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES



OIL ÖC. 1000-5/A

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES







Product Specifications

Chassis

Width : 55 cm
Length : 85 cm
Height : 82 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 1x 160 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ECO C Type

DRY ÖC. 1000-2

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES



OIL ÖC. 1000-2/A

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES







Product Specifications

Chassis

Width : 55 cm
Length : 85 cm
Height : 82 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 1x240 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell : Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ECO *C Type*

DRY **ÖC. 1000-2/P**

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL **ÖC. 1000-2/PA**

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Lubricator Tank Oily Pump



H W L

kg 51 kg

Ø60 Pipe

Product Specifications

Chassis
Width : 55 cm
Length : 95 cm
Height : 92 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 1x240 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

DRY ÖC. 1000-4

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES



OIL ÖC. 1000-4/A

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES







Product Specifications

Chassis

Width : 55 cm
Length : 85 cm
Height : 82 cm
Covered : Static Powder Paint
Color : Red

Bucket

Volume : 40 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator

Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump

Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group

Volume : 1x200 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features

Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

DRY **ÖC. 1000-4/P**

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Dry Pump

OIL **ÖC. 1000-4/PA**

SINGLE MILKING UNIT,
SINGLE STAINLESS STEEL BUCKET,
COW MILKING MACHINES


Lubricator Tank Oily Pump



H W L

kg
56 kg

Product Specifications

Chassis
Width : 55 cm
Length : 95 cm
Height : 92 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 40 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 1x200 cc Plastic
Milking Claw : 4 x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO MAX

DRY ÖC. 2002

SINGLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
COW MILKING MACHINES





Product Specifications

Chassis
Width : 55 cm
Length : 80 cm
Height : 82 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 20 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 3 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 1x160 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 105 pcs. (With Box 46 Pcs.)
40 Dc : 215 pcs. (With Box 102 Pcs.)

Oncel®

Sheep & Goat Milking Machines

2

www.oncelmak.com

•Milking liners are the only parts that touches to your animal so you need to pay more attention for the liners. We always offer our valuable business partners to change the rubber liners every 6 months (1000 hours usage) and silicone liners every 11 months (1500 hours usage)

•Pulsation rate must be 50/50 for sheep milking.70/30 for goat milking.

•Before and after milking process ,teats must be cleaned.

•Sheep and goats are usually milked twice a day. There must be 10 hours between morning and evening milking.

•Morning milking should be late in the real cold weather and early in the hot weather.

•One hour rest period before milking increases milk yield in a good way

•Scaring the animals during milking causes decreasing the milk of animal.

Oncel®

www.oncelmak.com

ÖC. 1004
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1010
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES


Dry Pump

ÖC. 1004/A
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1010/A
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES

Turbo Oily Pump


Optional : Lubricator Tank
Oily Pump



H W L

kg
58 kg

Gasoline Engine

For Goat	: ÖC.1004/B (Dry) - ÖC.1004/C (Oil)
For Sheep	: ÖC.1010/B (Dry) - ÖC.1010/C (Oil)

Product Specifications

Chassis
Width : 60 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 1 pc.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 2x100cc Plastic
Milking Claw : 4x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ÖC. 1005
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1011
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES



ÖC. 1005/A
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1011/A
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES





H W L

59 kg

Gasoline Engine
For Goat : ÖC.1005/B (Dry) - ÖC.1005/C (Oil)
For Sheep : ÖC.1011/B (Dry) - ÖC.1011/C (Oil)

Product Specifications

Chassis
Width : 60 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 1 pc.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 2x100 cc Plastic
Milking Claw : 4x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

öc. 1006
FOUR MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

öc. 1012
FOUR MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES



öc. 1006/A
FOURMILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

öc. 1012/A
FOUR MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES





H W L

kg 63 kg

Gasoline Engine
For Goat : ÖC.1006/B (Dry) - ÖC.1006/C (Oil)
For Sheep : ÖC.1012/B (Dry) - ÖC.1012/C (Oil)

Product Specifications

Chassis
Width : 60 cm
Length : 100 cm
Height : 102 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 40 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 2 pc.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 4x100 cc Plastic
Milking Claw : 8x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ÖC. 1007
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

ÖC. 1013
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES



ÖC. 1007/A
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

ÖC. 1013/A
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES





H W L

kg 64 kg

Gasoline Engine

For Goat : ÖC.1007/B (Dry) - ÖC.1007/C (Oil)
For Sheep : ÖC.1013/B (Dry) - ÖC.1013/C (Oil)

Product Specifications

Chassis
Width : 60 cm
Length : 100 cm
Height : 102 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 40 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 2 pc.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 4x 100 cc Plastic
Milking Claw : 8x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, C
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ÖC. 1013-2
FOUR MILKING UNIT,
DOUBLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1013-4
FOUR MILKING UNIT,
DOUBLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES



ÖC. 1013-2/A
FOUR MILKING UNIT,
DOUBLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1013-4/A
FOUR MILKING UNIT,
DOUBLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES





H W L

kg 74 kg

Gasoline Engine
For Goat : ÖC.1013-2/B (Dry) - ÖC.1013-2/C (Oil)
For Sheep : ÖC.1013-4/B (Dry) - ÖC.1013-4/C (Oil)

Product Specifications

Chassis
Width : 90 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 2 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 2 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 4x 100 cc Plastic
Milking Claw : 8x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ÖC. 1013-3
FOUR MILKING UNIT,
DOUBLE S/S BUCKET,
GOAT MILKING MACHINES

ÖC. 1013-5
FOUR MILKING UNIT,
DOUBLE S/S BUCKET,
SHEEP MILKING MACHINES

ÖC. 1013-3/A
FOUR MILKING UNIT,
DOUBLE S/S BUCKET,
GOAT MILKING MACHINES

ÖC. 1013-5/A
FOUR MILKING UNIT,
DOUBLE S/S BUCKET,
SHEEP MILKING MACHINES


Dry Pump


Turbo Oily Pump


Optional : Lubricator Tank
Oily Pump



H W L

76 kg

Gasoline Engine
For Goat : ÖC.1013-3/B (Dry) - ÖC.1013-3/C (Oil)
For Sheep : ÖC.1013-5/B (Dry) - ÖC.1013-5/C (Oil)

Product Specifications

Chassis
Width : 90 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 2 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 2 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 4x 100 cc Plastic
Milking Claw : 8x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ÖC. 3002
SIX MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 3006
SIX MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES



ÖC. 3002/A
SIX MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 3006/A
SIX MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES







Gasoline Engine
For Goat : ÖC.3002/B (Dry) - ÖC.3002/C (Oil)
For Sheep : ÖC.3006/B (Dry) - ÖC.3006/C (Oil)

Product Specifications

Chassis
Width : 53 cm
Length : 83 cm
Height : 97 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 40 Lt
Type : Aluminium
Qty : 1 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 6x 100 cc Plastic
Milking Claw : 12x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ÖC. 3003
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

ÖC. 3007
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES


Dry Pump

ÖC. 3003/A
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

ÖC. 3007/A
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES


Lubricator Oily Pump



H W L

kg
49 kg

Gasoline Engine
For Goat : ÖC.3003/B (Dry) - ÖC.3003/C (Oil)
For Sheep : ÖC.3007/B (Dry) - ÖC.3007/C (Oil)

Product Specifications

Chassis
Width : 53 cm
Length : 83 cm
Height : 97 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 40 Lt
Type : Stainless Steel
Qty : 1 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 4x 100 cc Plastic
Milking Claw : 8x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO Type

ÖC. 1004-1
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1010-1
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES



ÖC. 1004-1/A
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

ÖC. 1010-1/A
DOUBLE MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES







Product Specifications

Chassis
Width : 53 cm
Length : 83 cm
Height : 97 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 2x 100 cc Plastic
Milking Claw : 4x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO Type

öc. 1005-1
DOUBLE MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

öc. 1011-1
DOUBLE MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES

öc. 1005-1/A
DOUBLE MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

öc. 1011-1/A
DOUBLE MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES









Product Specifications

Chassis
Width : 53 cm
Length : 83 cm
Height : 97 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 1 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 2x 100 cc Plastic
Milking Claw : 4x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO Type

öc. 1006-1
FOUR MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

öc. 1012-1
FOUR MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES

öc. 1006-1/A
FOUR MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
GOAT MILKING MACHINES

öc. 1012-1/A
FOUR MILKING UNIT,
SINGLE ALUMINIUM BUCKET,
SHEEP MILKING MACHINES









Product Specifications

Chassis
Width : 55 cm
Length : 95 cm
Height : 92 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 2 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 4x 100 cc Plastic
Milking Claw : 8x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

CE TSE-HYB ISO 9001 2015 CERTIFIED

ECO Type

öc. 1007-1
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

öc. 1013-1
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES

öc. 1007-1/A
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
GOAT MILKING MACHINES

öc. 1013-1/A
FOUR MILKING UNIT,
SINGLE S/S BUCKET,
SHEEP MILKING MACHINES









Product Specifications

Chassis
Width : 53 cm
Length : 83 cm
Height : 97 cm
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pcs.

Pulsator
Type : Pneumatic
For Sheep : 50/50
For Goat : 70/30
Qty : 2 pcs.
Upper lid : PVC

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : ÖC.116 Graphite (Dry)
ÖC.120 Fiber (Oil)
Palette Size : 4.9mmx43mmx70mm

Milking Group
Volume : 4x 100 cc Plastic
Milking Claw : 8x Silicone Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

Oncel®

Fixed System Milking Machines

3

www.oncelmak.com

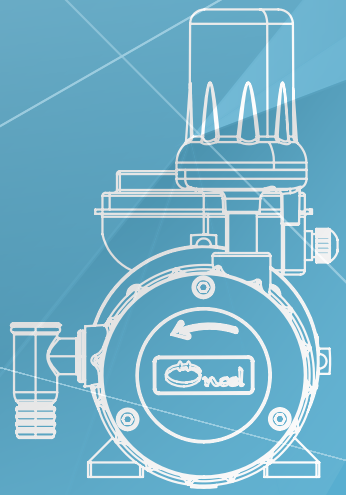

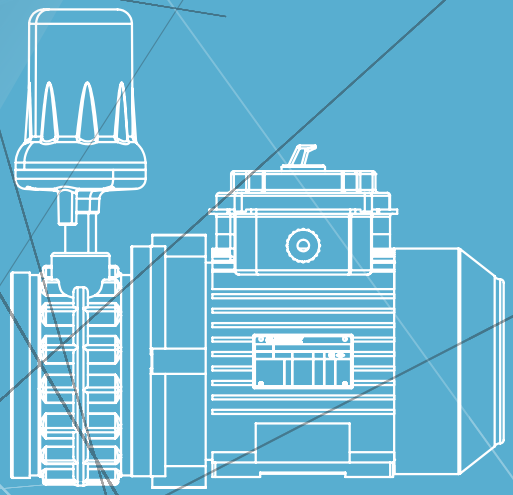

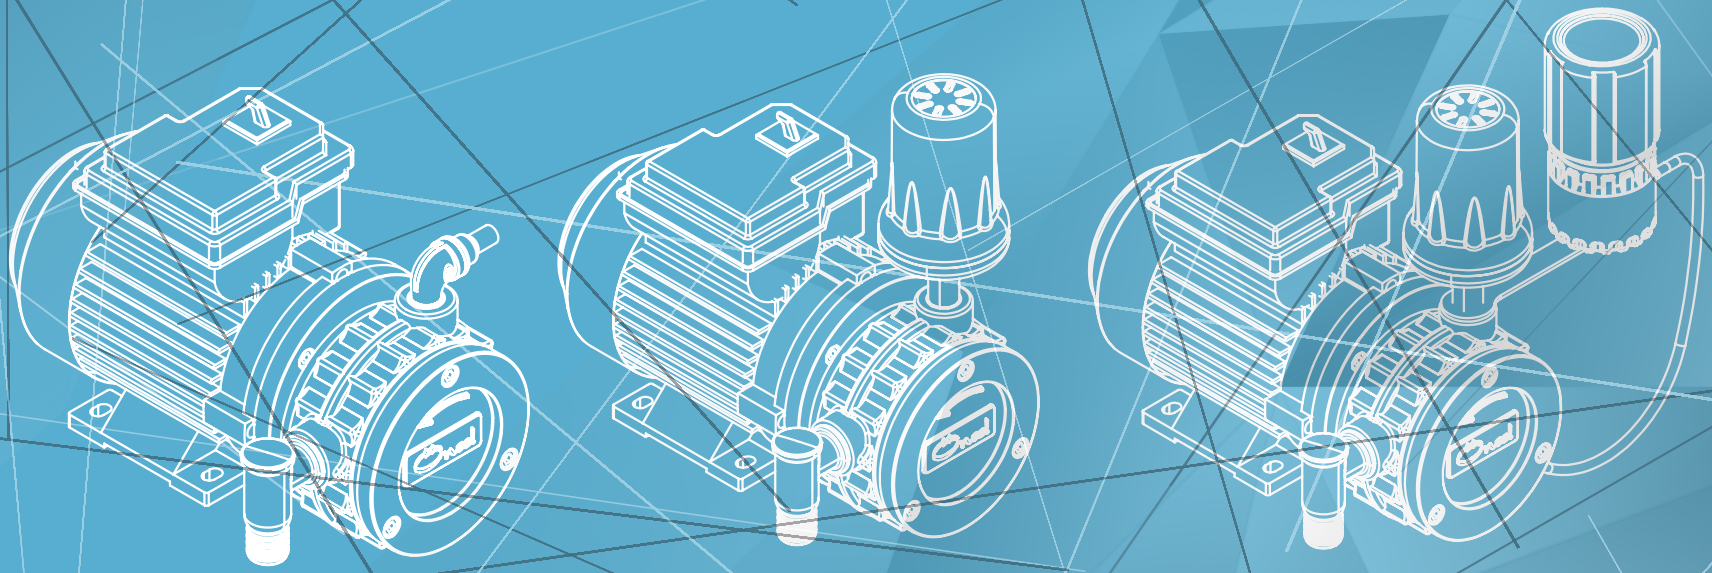



Dry Pump



Turbo Oily Pump



48,5 kg

DRY ÖC. 1049
70 DRY TYPE VACUUM PUMP

Vacuum Pump	: DryType Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 150-180 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine (19x73mm)	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Color	: Black
Optional Engine	**:0,55Kw 1450 d/d 220V /60 Hz**

OIL ÖC. 1049-1
70 OIL TYPE VACUUM PUMP

Vacuum Pump	: Oil Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 150-180 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine (19x73mm)	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Color	: Black
Optional Engine	**:0,55Kw 1450 d/d 220V /60 Hz**

***Dry Type 70 Pump and Turbo Oily 70 Pump Explode Drawing**

1-OC.206 – Electric Engine
2-Flange 70" Dry/Oil
3-M8X20 Bolt
4- Rotor
5-Pump Body
6-M8x20 Bolt
7-Pallets
8-Front Lid
9-OC.058 – Silencer
10-OC.270 – Checkvalve Set
11-M8 x 70 Bolt
12-M8 x 16 Bolt

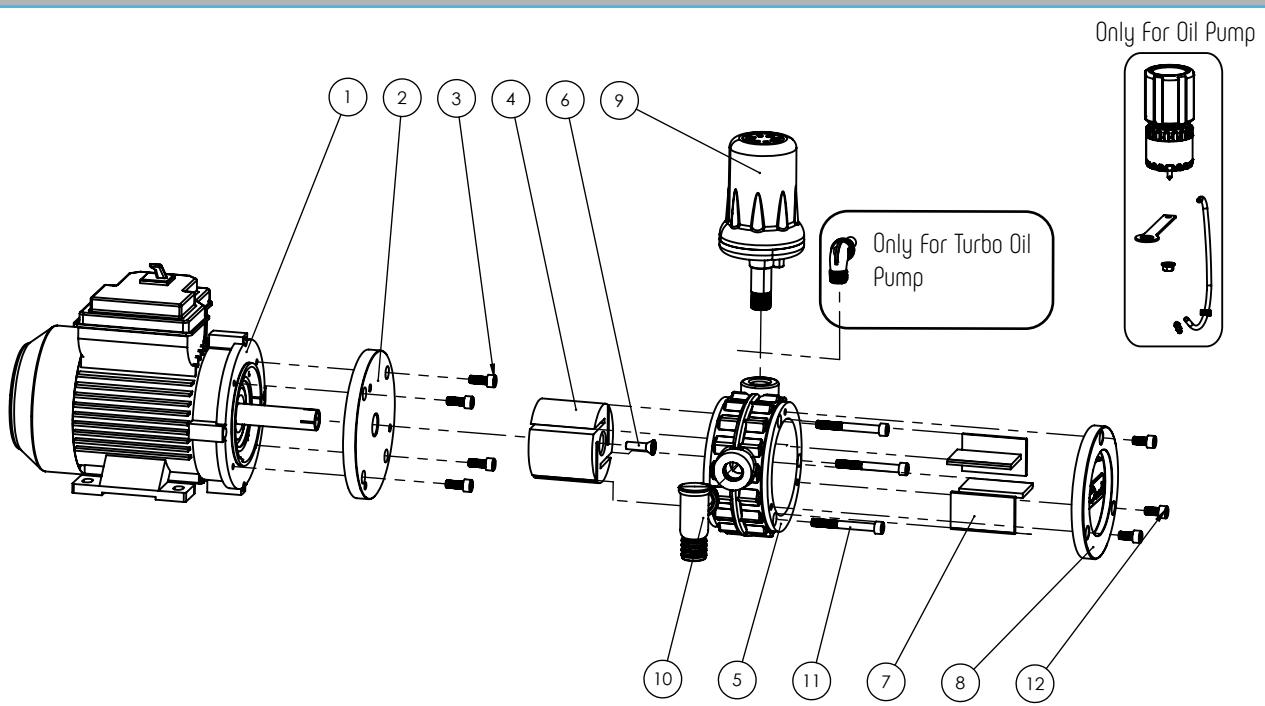

DRY ÖC. 1059
80 DRY TYPE VACUUM PUMP

Vacuum Pump	: DryType Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 180-200 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine (22x84mm)	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Color	: Black
Optional Engine	**:0,55Kw 1450 d/d 220V /60 Hz**

OIL ÖC. 1059-1
80 OIL TYPE VACUUM PUMP

Vacuum Pump	: Oil Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 180-200 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine (22x84mm)	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Color	: Black
Optional Engine	**:0,55Kw 1450 d/d 220V /60 Hz**

DRY ÖC. 1050
85 DRY TYPE VACUUM PUMP

Vacuum Pump	: DryType Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 200-240 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine (22x84mm)	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Color	: Black
Optional Engine	**:0,55Kw 1450 d/d 220V /60 Hz**

OIL ÖC. 1050-1
85 OIL TYPE VACUUM PUMP

Vacuum Pump	: Oil Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 180-200 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine (22x84mm)	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Color	: Black
Optional Engine	**:0,55Kw 1450 d/d 220V /60 Hz**

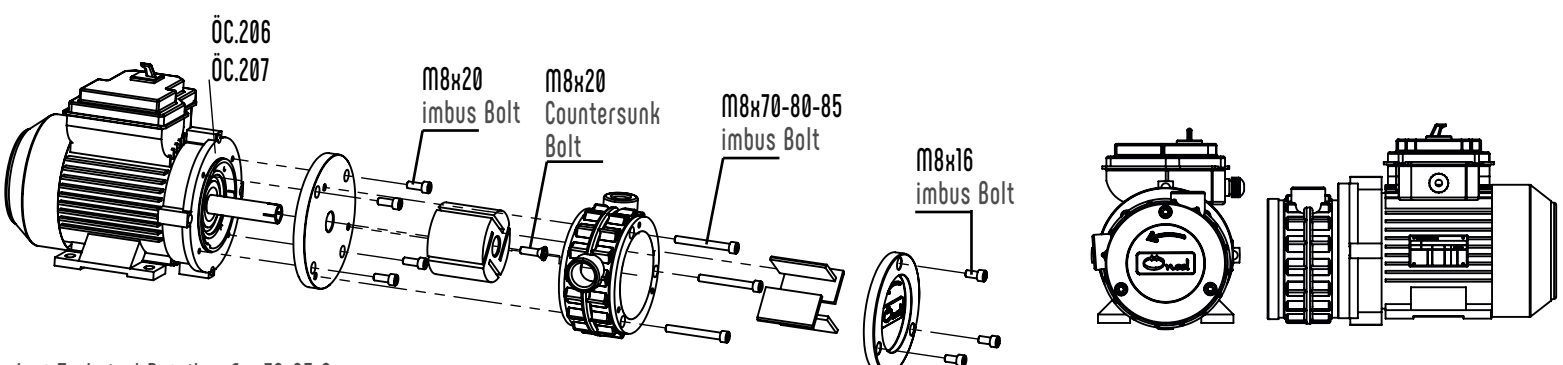

Product Technical Details - For 70-85 Pumps.

Optional Features (Only Vacuum Tank)

Cover : Customer Demand or zinc Covered

Static Powder Paint

DRY ÖC. 1051

70 DRY TYPE VACUUM PUMP

Vacuum Pump	: Dry Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 150-180 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Tank Capacity	: 18 Lt
Optional Features	
Electrical Engine	:0,55Kw 1450 d/d 220V /60 Hz

OIL ÖC. 1051-1

70 OIL TYPE VACUUM PUMP

Vacuum Pump	: Oil Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 150-180 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Tank Capacity	: 18 Lt
Optional Features	
Electrical Engine	:0,55Kw 1450 d/d 220V /60 Hz

Optional Features (Only Vacuum Tank)

Cover : Customer Demand or zinc Covered

Static Powder Paint

DRY ÖC. 1060

80 DRY TYPE VACUUM PUMP

Vacuum Pump	: Dry Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 180-200 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Tank Capacity	: 18 Lt
Optional Features	
Electrical Engine	:0,55Kw 1450 d/d 220V /60 Hz

OIL ÖC. 1060-1

80 OIL TYPE VACUUM PUMP

Vacuum Pump	: Oil Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 180-200 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Tank Capacity	: 18 Lt
Optional Features	
Electrical Engine	:0,55Kw 1450 d/d 220V /60 Hz

DRY ÖC. 1052
85 DRY TYPE VACUUM PUMP

Vacuum Pump	: DryType Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 200-240 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Tank Capacity	: 18 Lt
Optional Features	
Electrical Engine	:0,55Kw 1450 d/d 220V /60 Hz

OIL ÖC. 1052-1
85 OIL TYPE VACUUM PUMP

Vacuum Pump	: Oil Type Vacuum Pump
Working System	: Direct Drive
Vacuum Capacity	: 180-200 lt./dk. (50 kPa)
Milking Capacity	: 2 Pc.
Electrical Engine	: 0,55 Kw 1450 d/d 220V /50 Hz
Dimensions	: 25x25x42Cm
Weight	: 15 Kg
Tank Capacity	: 18 Lt
Optional Features	
Electrical Engine	:0,55Kw 1450 d/d 220V /60 Hz

Optional Features

Cover : Customer Demand or zinc Covered

Static Powder Paint

ÖC. 040
OIL TYPE VACUUM TANK

Capacity : 17 Lt.
Weight : 4050gr.

Tank Lid ,Discharge Plug, Regulator are not included.

Optional Features

Cover : Customer Demand or zinc Covered

Static Powder Paint

ÖC. 039-8
DRY TYPE VACUUM TANK

Capacity : 17 Lt.
Weight : 4050gr.

Tank Lid ,Discharge Plug, Regulator are not included.

Optional Features

Cover : Customer Demand or zinc Covered

Static Powder Paint

Vacuum Pump Sets

ÖC.078	70 mm Dry Type Pump Set
ÖC.099	70 mm Oil Type Pump Set
ÖC.203	80 mm DryType Pump Set
ÖC.203-1	80 mm Oil Type Pump Set
ÖC.204	85 mm Dry Type Pump Set
ÖC.204-1	85 mm Oil Type Pump Set

Elektrik Motoru - Electric Engine

ÖC.206	0,55 Kw. 1500 d/d. 220-230V. 50 Hz
ÖC.207	0,75 Kw. 1 Hp. 1500 d/d. 220-230V. 50 Hz

Opsiyonel - 110-120V 60Hz (Priz tipi Üçlü - A/B)
Optional - 110-120V 60Hz (Plug Type - A/B)

Standart Priz (F Tipi)
Plug (F Tip)

ÖC.251 Şalter Kutusu Set
Switch Box Set

ÖC.054 Plastik Motor Mil Muhafazası
Plastic Engine Shaft Cover

İsteğe bağlı farklı renkte üretilebilir.
The optional color may vary.

ÖC.251-1 220V Şalter
220V Switch

ÖC.251-2 0.55 kW Kondansatörü
0.55 kW Capacitor
12 mf

ÖC.184 70 Lik Çekvalf Seti
70 Check Valve Set

ÖC.205 85 Lik Çekvalf Seti
85 Check Valve Set

ÖC.252 90° Kuyruklu Dirsek
90° Elbow tube Connector

ÖC.063-1 Plastik Motor İzolasyon Pulu
Engine isolated Plastic Rove



ÖC. 1053-1
350 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 350 lt./dk. (50 kPa)
Milking Capacity	: 3-4 Pc.

ÖC. 1054-1
500- OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 500 lt./dk. (50 kPa)
Milking Capacity	: 5-6 Pc.

ÖC. 1055-1
1500 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 850 lt./dk. (50 kPa)
Milking Capacity	: 8 Pc.

ÖC. 1056-1
2000 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 1100 / 1300lt./dk. (50 kPa)
Milking Capacity	: 10-12 Pc.

ÖC. 1057-1
2500- OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 1800 lt./dk. (50 kPa)
Milking Capacity	: 14-20 Pc.

ÖC. 1058-1
3250 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 2800 lt./dk. (50 kPa)
Milking Capacity	: 20-30 Pc.

ÖC. 173
LUBRICATOR

ÖC. 173-1
LUBRICATOR WASTE BOX

ÖC. 197
LUBRICATOR 0,5 LT

ÖC. 1054
1000 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 350 lt./dk. (50 kPa)
Milking Capacity	: 3-4 Pc.
Tank Capacity	: 34 lt.
Electrical Engine	: 1,5 hp 1400 d/d 220V / 50 Hz
Dimensions	: 44x97x107 Cm
Weight	: 80 Kg

ÖC. 1055
1500 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 800 lt./dk. (50 kPa)
Milking Capacity	: 8 Pc.
Tank Capacity	: 34 lt.
Electrical Engine	: 3 hp 1400 d/d 380V / 50 Hz
Dimensions	: 54x94x130 Cm
Weight	: 110 Kg

ÖC. 1056
2000 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 1100 / 1300 lt./dk. (50 kPa)
Milking Capacity	: 10-12 Pc.
Tank Capacity	: 34 lt.
Electrical Engine	: 4 hp 1400 d/d 380V / 50 Hz
Dimensions	: 54x94x130 Cm
Weight	: 120 Kg

ÖC. 1057
2500 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 1100 / 1300 lt./dk. (50 kPa)
Milking Capacity	: 14-20 Pc.
Tank Capacity	: 90 lt.
Electrical Engine	: 7,5 hp 1400 d/d 380V / 50 Hz
Dimensions	: 68x120x155 Cm
Weight	: 185 Kg

ÖC. 1058
3250 - OIL TYPE VACUUM PUMP

Vacuum Pump Type	: Oily Type Vacuum Pump
Working System	: Belt-Pulley System
Vacuum Capacity	: 2800 lt./dk. (50 kPa)
Milking Capacity	: 20-30 Pc.
Tank Capacity	: 90 lt.
Electrical Engine	: 10 hp 1400 d/d 380V / 50 Hz
Dimensions	: 68x120x155 Cm
Weight	: 240 Kg

"Included"



ÖC. 1040-B
FIXED SYSTEM VACUUM PUMP (DRY TYPE)


Dry Pump

ÖC. 1040-C
FIXED SYSTEM VACUUM PUMP (OILY TYPE)


Turbo Oily Pump


Optional : Lubricator Tank Oily Pump





Product Specifications

Chassis
Width : 60 cm
Length : 98 cm
Height : 105 cm
Covered : Static Powder Paint
Color : Red

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Tank Capacity : 17 lt.
Palette Type : Graphite
Palette Size : 4.9mmx43mmx70mm

Features
170 lt/min Air Vacuum Capactiy 50 kPa
0,55Kw -220 V - 50 Hz 1450 rpm Electric Engine
Milking Capacity : 2 Pcs. Cow- 4 Pcs. Sheep/ Goat
Recomend Vacuum Line Size: 1 1/4"

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 205 pcs. (With Box 102 Pcs.)

ÖC. 1062
FIXED SYSTEM VACUUM PUMP (DRY TYPE)



ÖC. 1062/A
FIXED SYSTEM VACUUM PUMP (OILY TYPE)





Product Specifications

Chassis
Width : 50 cm
Length : 60 cm
Height : 40 cm
Covered : Static Powder Paint
Color : Red

Vacuum Pump
Type : 160-180 L/min
Engine Power : 0,55 Kw
Rotating : 1450 rpm
Voltage : 220V - 50 Hz
Flow Rate : 170 lt/min.
Palette Type : Graphite
Palette Size : 4.9mmx43mmx70mm

Features
170 lt/min Air Vacuum Capactiy 50 kPa
0,55Kw -220 V - 50 Hz 1450 rpm Electric Engine
Milking Capacity : 2 Pcs. Cow- 4 Pcs. Sheep/ Goat
Recomend Vacuum Line Size: 1 1/4"

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 150 pcs. (With Box 100 Pcs.)
40 Dc : 300 pcs. (With Box 200 Pcs.)

ÖC. 3004

FIXED SYSTEM GASOLINE ENGINE VACUUM PUMP (DIRECT DRIVE)

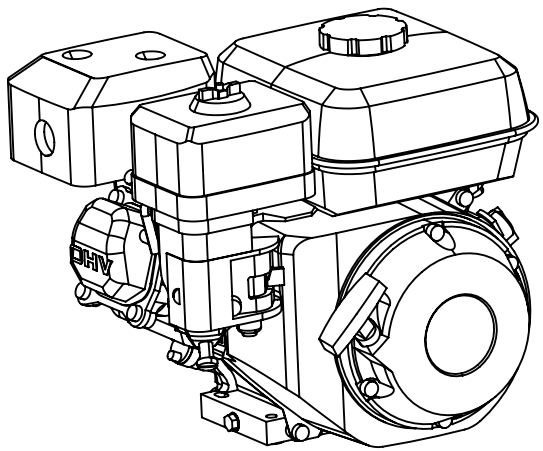

Product Specifications

Chassis

Width : 50 cm
Length : 52 cm
Height : 60 cm
Covered : Static Powder Paint
Color : Red

Vacuum Pump

Type : 160-180 L/min
Engine Power : Gasoline Engine
Flow Rate : 170 lt/min.
Tank Capacity : 10 lt.
Palette Type : Graphite
Palette Size : 4.9mmx43mmx70mm

Features

170 lt/min Air Vacuum Capactiy 50 kPa
Gasoline Engine ,
Milking Capacity : 2 Pcs. Cow- 4 Pcs. Sheep/ Goat
Recomend Vacuum Line Size: 1 1/4"

Optional Features

Chassis Cover : Customer Demand or zinc Covered
Static Powder Paint

Packaging : Carton Box , Wooden Box, Plastic Bag

Container
20 Dc : 95 pcs. (With Box 46 Pcs.)
40 Dc : 200 pcs. (With Box 100 Pcs.)

ÖC. 1014

SINGLE MILKING UNIT
FIXED SYSTEM DRY VACUUM PUMP
(ALUMINIUM BUCKET)

ÖC. 1014-A

SINGLE MILKING UNIT
FIXED SYSTEM OIL VACUUM PUMP
(ALUMINIUM BUCKET)

42 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 1x240 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator

ÖC. 1015

SINGLE MILKING UNIT
FIXED SYSTEM DRY VACUUM PUMP
(STAINLESS STEEL BUCKET)

ÖC. 1015-A

SINGLE MILKING UNIT
FIXED SYSTEM OIL VACUUM PUMP
(STAINLESS STEEL BUCKET)

43 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 1x240 cc Plastic
Milking Claw : 4x Rubber Liners
Weight : 2300 gr.
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

ÖC. 1016

DOUBLE MILKING UNIT
FIXED SYSTEM DRY VACUUM PUMP
(ALUMINIUM BUCKET)

ÖC. 1016-A

DOUBLE MILKING UNIT
FIXED SYSTEM OİL VACUUM PUMP
(ALUMINIUM BUCKET)

50 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 2 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Milking Group
Volume :2x240 cc Plastic
Milking Claw :8x Rubber Liners
Weight :2300 gr. (1pc.)
Milk Hose :Ø24xØ14x2250cm
Pulse Hose :Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

ÖC. 1017

DOUBLE MILKING UNIT
FIXED SYSTEM DRY VACUUM PUMP
(STAINLESS STEEL BUCKET)

ÖC. 1017-A

DOUBLE MILKING UNIT
FIXED SYSTEM OİL VACUUM PUMP
(STAINLESS STEEL BUCKET)

52 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 2 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Milking Group
Volume : 2x240 cc Plastic
Milking Claw : 8x Rubber Liners
Weight : 2300 gr. (1pc.)
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

ÖC. 1018
DOUBLE MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE

ÖC. 1022
DOUBLE MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE

DRY

41,5 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Goat:70/30 / For Sheep :50/50
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 2x100 cc Plastic
Milking Claw : 4x Rubber Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid
Vacuum Pump : Oil Type

ÖC. 1019
DOUBLE MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE
(STAINLESS STEEL BUCKET)

ÖC. 1023
DOUBLE MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE
(STAINLESS STEEL BUCKET)

DRY

42,5 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Goat:70/30 / For Sheep :50/50
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 2x100 cc Plastic
Milking Claw : 4x Rubber Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid
Vacuum Pump : Oil Type

ÖC. 1018-A

DOUBLE MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE
(STAINLESS STEEL BUCKET)

ÖC. 1022-A

DOUBLE MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE

OIL

41,5 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Goat:70/30 / For Sheep :50/50
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 2x100 cc Plastic
Milking Claw : 4 x Rubber Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid
Vacuum Pump : Dry Type

ÖC. 1019-A

DOUBLE MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE
(STAINLESS STEEL BUCKET)

ÖC. 1023-A

DOUBLE MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE
(STAINLESS STEEL BUCKET)

OIL

42,5 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Goat:70/30 / For Sheep :50/50
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 2x100 cc Plastic
Milking Claw : 4 x Rubber Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid
Vacuum Pump : Dry Type

öc. 1020

FOUR MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE

öc. 1024

FOUR MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE

DRY

48,5 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 2 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Milking Group
Volume :2x240 cc Plastic
Milking Claw :8 x Rubber Liners
Weight :2300 kg (1pc.)
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid
Vacuum Pump : Oil Type

öc. 1021

FOUR MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE

öc. 1025

FOUR MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE

DRY

52 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 2 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Milking Group
Volume : 2x240 cc Plastic
Milking Claw : 8x Rubber Liners
Weight : 2300 kg (1pc.)
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid
Vacuum Pump : Oil Type

ÖC. 1020-A

FOUR MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE

ÖC. 1024-A

FOUR MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE

OIL

41,5 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Aluminium
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Goat:70/30 / For Sheep :50/50
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 2x100 cc Plastic
Milking Claw : 4 x Rubber Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

ÖC. 1021-A

FOUR MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING MACHINE

ÖC. 1025-A

FOUR MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING MACHINE

OIL

42,5 kg

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : Stainless Steel
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Goat:70/30 / For Sheep :50/50
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume : 2x100 cc Plastic
Milking Claw : 4 x Rubber Liners
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

öc. 1043

SINGLE MILKING UNIT,
FIXED SYSTEM ,COW MILKING,
ALUMINIUM BUCKET

öc. 1044

SINGLE MILKING UNIT,
FIXED SYSTEM ,COW MILKING,
STAINLESS STEEL

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume :2x240 cc Plastic
Milking Claw :8 x Rubber Liners
Weight :2300 kg (1pc.)
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

öc. 1045

SINGLE MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING,
ALUMINIUM BUCKET

öc. 1046

SINGLE MILKING UNIT,
FIXED SYSTEM ,GOAT MILKING,
STAINLESS STEEL

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 70/30
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume :2x240 cc Plastic
Milking Claw :8 x Rubber Liners
Weight :2300 kg (1pc.)
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

öc. 1045-A

SINGLE MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING,
ALUMINIUM BUCKET

öc. 1046-A

SINGLE MILKING UNIT,
FIXED SYSTEM ,SHEEP MILKING,
STAINLESS STEEL

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 50/50
Qty : 1 pc.
Upper lid : PVC

Milking Group
Volume :2x240 cc Plastic
Milking Claw :8 x Rubber Liners
Weight :2300 kg (1pc.)
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid

FIXED SYSTEM MILKING MOBIL STAINLESS STEEL

Product Specifications

Chassis
Covered : Static Powder Paint
Color : Red

Bucket
Volume : 30 Lt
Type : S/S
Qty : 1 pc.

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 2 pc.
Upper lid : PVC

Milking Group
Volume :2x160 cc Plastic
Milking Claw :8 x Rubber Liners
Weight :2300 gr. (1pc.)
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2250cm

Optional Features
Milk Claw : 150 cc, 240cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, S/Steel
Liner Type : Silicone or Color ,Silicone
Pulsator : Stainless Steel Upper Lid
Bucket : Aluminium

ÖC. 3000
EIGHT MILKING UNIT,
COW MILKING MACHINES

ÖC. 3100
SIXTEEN MILKING UNIT,
SHEEP MILKING MACHINES

ÖC. 3200
SIXTEEN MILKING UNIT,
GOAT MILKING MACHINES

Product Specifications

Chassis
Width : 130 cm
Length : 250 cm
Height : 215 cm
Covered : Static Powder Paint
Color : Red

Milk Tank
Volume : 30 Lt
Type : Stainless Stell

Pulsator
Type : Pneumatic
For Cow : 60/40
For Sheep : 50/50
For Goat : 70/30
Qty : 8 pcs.
Upper lid : PVC

Vacuum Pump
Type : 100 0 L/min
Engine Power : 1,5 Kw
Rotating : 1400 rpm
Voltage : 220V - 50 Hz
Tank Capacity : 34 lt.

Milking Group
Milking Claw : 8 x 160cc
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2700cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid

ÖC. 3001

FOUR MILKING UNIT,
COW MILKING MACHINES
(TRANSFER BUCKET)

Product Specifications

Chassis
Width : 130 cm
Length : 190 cm
Height : 175 cm
Covered : Static Powder Paint
Color : Red

Milk Tank
Volume : 40 Lt x 3 pcs
Type : Alminium

Pulsator
Type : Pneumatic
For Cow : 60/40
Qty : 4 pcs.
Upper lid : PVC

Vacuum Pump
Type : 350 L/min
Engine Power : 1,1 Kw
Rotating : 1400 rpm
Voltage : 220V - 50 Hz
Tank Capacity : 17 lt.

Milking Group
Milking Claw : 4 x 240cc
Milk Hose : Ø24xØ14x2250cm
Pulse Hose : Ø13xØ7x2700cm

Optional Features
Chassis Cover : Customer Demand or zinc Covered Static Powder Paint

Voltage : 110V - 60 Hz / 220V - 50Hz
Milk Claw : 150 cc, 160 cc, 200 cc, 340 cc
Teat Cup Shell :Transparent, Plastic, Stainless Steel
Liner Type : Silicone or Color Silicone
Pulsator : Stainless Steel Upper Lid

Pallet Graphite Set (4 Pcs.)

	A	B	C
ÖC.115	4,85	85	41
ÖC.115-1	4,70	85	43
ÖC.116	4,93	70	43
ÖC.116-1	4,9	80	43
ÖC.116-2	4,9	75	43
ÖC.117	5,95	70	46
ÖC.117-1	5,90	62	41
ÖC.118	4,95	65	40
ÖC.118-1	4,9	86	40
ÖC.119	4,9	70	41,5



Oil Type Vacuum Pump Fiber Palette

65-85 mm	A	B	C
ÖC.120	4,93	70	43
ÖC.120-1	4,90	80	43
ÖC.121	5,95	70	46
ÖC.122	4,90	70	41,5
ÖC.123	4,95	65	40
ÖC.123-1	4,85	85	41
ÖC.180	5,9	85	55

100-250 mm	A	B	C
ÖC.176	4,9	100	43
ÖC.177	4,9	150	43
ÖC.178	4,9	200	43
ÖC.179	4,9	250	43

Pallet Graphite Set (4 Pcs.)



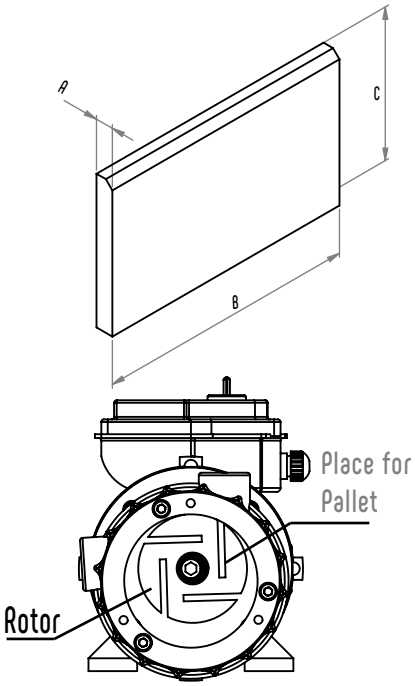

Oncel®

Milking Parlours

4

www.oncelmak.com

In order to increase the milk quality of our milking rooms; It has been used stainless steel pipes in the milking line and the milk pre-collector and milk transfer pumps are made of stainless steel. Adittionally for storing the milk in a hygenic room in order to store the milk in hygienic environment, milk waiting tanks with cooling system are made of stainless steel material. In milking parlour after milking milk lines and automatic milking heads cleaning system are developed.

ÖNCEL is aware of milking is the harvest time of milking companies. So to do milking in an effective way in parlours we produce and use equipment that brings us correct design , correct pulsation, minimum labor , maximum efficiency. Fishbone Milking System is the best system for maximum labor today.

Milking Stop Irons 48-3 mm hot dipping galvanized metal pipe.

- Mounting is the screwing system without weldingIts
- Capacity between 1x6 and 2x15 .
- Milk claw capacity, washing system pulsations lactometer automatic header remover are optional.
- Vacuum pressure distribution for animal chest health and hygiene is evenly distributed to the animals in the whole milking.
- For this reason, the milking system does not allow the formation of chest deflation due to animal chest pains or high vacuum distribution.
- Also thanks to 30 degree in milking system milker can watch the animal.
- The fishbone milking system is manufactured from the glazed material and this minimizes the corrosion of animal stool acids .
- 2 years warranty.

The electronic milk meter allows the milking of animals to be collected in a container by electronic liquid metering and transferred to the ÖNCEL milk meter panel and digitally reflected to the screen. The margin of error in milk measurement is minimized. At the same time control panel enables us edit the settings of automatic header remover and pulsation. milk meter and automatic header remover could work together or could work alone.
It is designed for professional companies and milking and animal waiting time are reduced. It is designed with Sütkar quality to help companies with providing of getting fast and accurate position. Installation between 1x10 and 2x30 is provided Fast Exit milking system is presented to the enterprises of the company with one sided system and two sided system.

PIPELINE SYSTEMS

It is a central milking system that can be installed in a corral or open area in the production facilities that do not require construction or where there is not enough place. Producer can milk at the same time with 12 springs in 7-8 minutes and can automatically transfer milk produced during milking to cooling tank.

Pipeline Technicial Specifications

Vacuum pumps: A Class , has oiled crawler and built-in vacuum tank.

- Installation is mounted between the lock.
- User can change capacity between 1x6 and 1x12
- Pipeline system washing (closed circuit washing system) is included in the system
- Cleaning at the same time providing washing program adjustment item receiving time rinsing time providing PLC display automatic washing package as well as optional milk quality and We ensure that the production chain starts without disturbing the hygiene.
- 2 years warranty

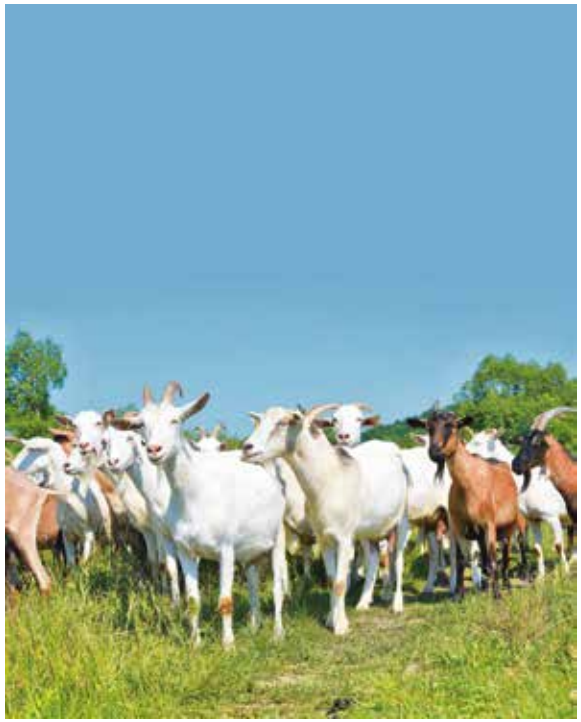

ÖNCEL as a result of research and development activities carried out by animal breeding for many years; designed a group of small ruminant milking units consisting of new high-performance products for efficient and efficient milking in small milkings.
These product groups have been developed to meet the needs of professional milkers.

Fast output systems.
Pneumatic feed systems.
Ergonomic milking.
Improved milking performance.
Regularity at the vacuum level.
Ease of Use.
Breast health protection.
Herd management system integration.

Oncel®

Milking Machines Chassises

5

www.oncelmak.com

ÖC. 1026
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES

ÖC. 1027
DOUBLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES

ÖC. 1030
DOUBLE MILKING UNIT, DOUBLE BUCKET, MILKING MACHINES CHASSISES

ÖC. 1031
DOUBLE MILKING UNIT, DOUBLE BUCKET, GASOLİNE ENGİNE MİLKİNG MACHINES CHASSISES

ÖC. 1028
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES (ECO)

ÖC. 1029
DOUBLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES (ECO)

Optional Features

Chassis Cover : Customer Demand or zinc Covered

Static Powder Paint

ÖC. 1040
FIXED SYSTEM CHASSISES

ÖC. 1028-1
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES (ECO PLUS SERIES)

ÖC. 1028-2
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES (ECO)

ÖC. 1031
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES (ECO MINI SERIES)

ÖC. 1042
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES FIXED SYSTEM

ÖC. 1042-1
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES FIXED SYSTEM

Optional Features

Chassis Cover : Customer Demand or zinc Covered

Static Powder Paint

ÖC. 1041
MILK BUCKET CARRIAGE TROLLEY

ÖC. 1028-3
SINGLE MILKING UNIT, SINGLE BUCKET, MILKING MACHINES CHASSISES (ECO PLUS SERIES)

Optional Features

Chassis Cover : Customer Demand or zinc Covered

Static Powder Paint

Öncel®

Milking System Parts & Livestock Equipments

Be Previleged with Öncel® Because You, deserve it...

#oncelmakina

MILKING MACHINES

Factory : Yalıntaş Mah. 534.Sokak No: 13
MustafaKemalPaşa / Bursa / TÜRKİYE

+90 224 614 12 50
+90 224 614 12 57

www.oncelmak.com -oncel@oncelmak.com

Copyright © 2025 all rights ÖNCEL MAKİNE Ltd. Şti. reserved.